

EQUIP. TYPE *R 390A/URR* EXP. NO.

COL 280-1275-00


NOTICE: WHEN GOVERNMENT DRAWINGS, SPECIFICATIONS, OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE UNITED STATES GOVERNMENT THEREBY INCURS NO RESPONSIBILITY NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE, OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

THIS DOCUMENT HAS BEEN PURCHASED BY THE GOVERNMENT AND MAY BE REPRODUCED AND USED IN CONNECTION WITH ANY GOVERNMENT PROCUREMENT OR MAINTENANCE OPERATION.

* FOR INFORMATION ONLY, CONTRACTOR MAY AT HIS OPTION DEVIATE FROM THESE PROCESS DETAILS.

~~* SWE APPROVAL~~
~~SYM PR10072-7~~

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL
A ₂	A ₁ -WAS A COMMERCIAL TYPE DECAL A ₂ -MIL-E-5272 WAS JAN -M-745.	19 OCT. 59	42428-PC-59-AI-51 REV'D. PME

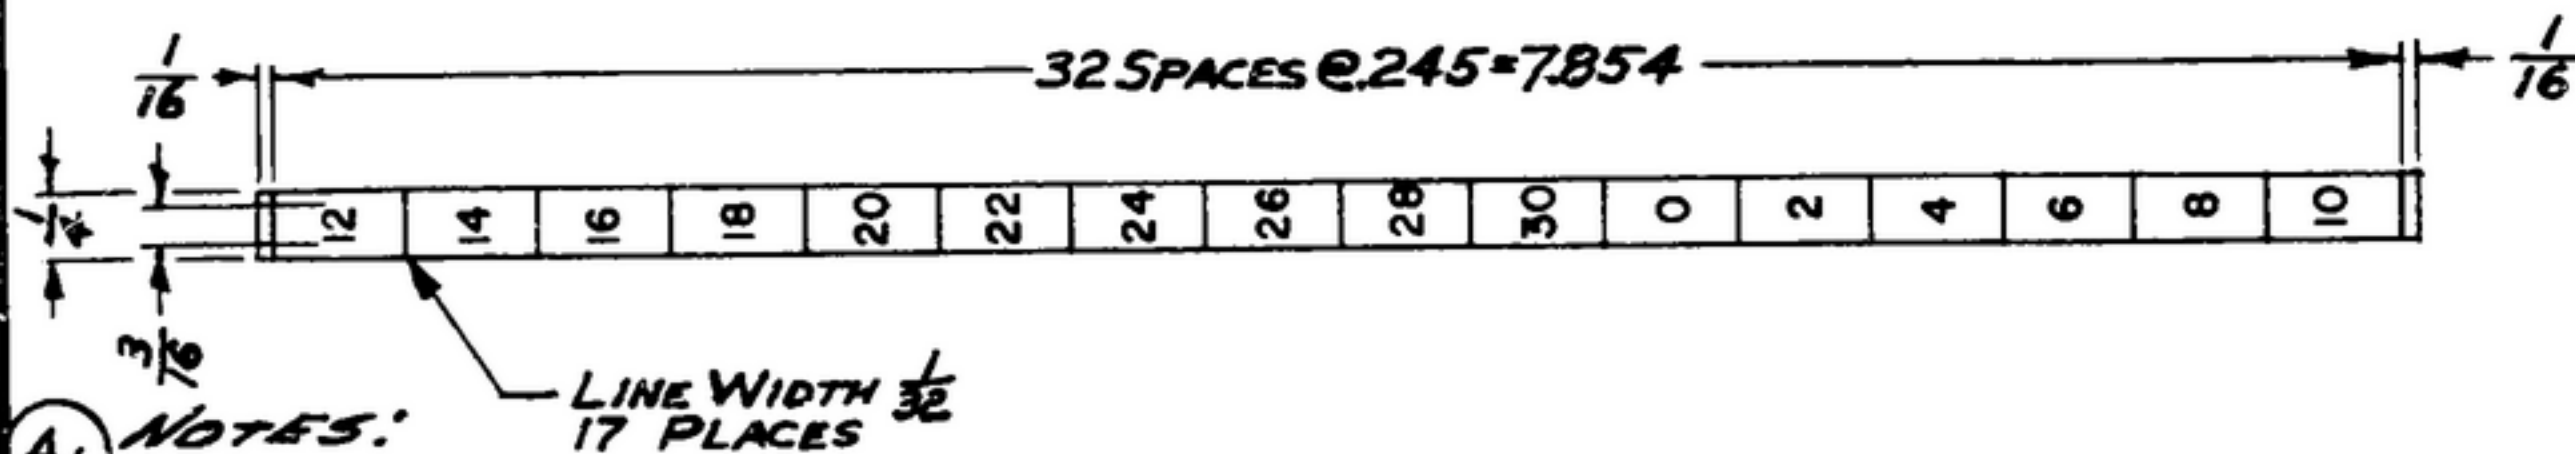

- A1** NOTES:
- DECAL SHALL CONFORM TO TYPE I PER MIL-D-8635.

MARKINGS: WHITE, BORDER OMITTED. BACKGROUND, BLACK
 AMBIENT TEMP RANGE: -65°C TO +100°C.

DECAL SHALL BE OF THE FUNGUS RESISTANT AND NON-SOLUBLE-IN-WATER TYPE
 APPLIED DECAL SHALL BE CAPABLE OF WITHSTANDING A 30 DAY HUMIDITY

TEST IN ACCORDANCE WITH SPEC. MIL-E-5272 OR AN EQUIVALENT HUMIDITY TEST,
 AS WELL AS TEMPERATURES IN THE RANGE OF -65°C TO +100°C WITHOUT IMPAIRING ITS SERVICEABILITY OR LEGIBILITY.

* PROOF MUST BE SUBMITTED TO THE PRIME CONTRACTOR FOR APPROVAL

A2

COLLINS PART NO.	ITEM	REQS	PART NO.	DESCRIPTION	MATL	MATL SPEC
LIST OF MATERIAL						
-COLLINS PART NO. <i>559 0188 002</i>						

DRAWN <i>Hamer</i>		CHECKED <i>[Signature]</i>	APPROVED	COLLINS-RADIO CO. SEAR-OAPIO-IOWA <i>14214-PH-51-93</i>	LABEL-TRANSFER	DEPARTMENT OF THE ARMY SIGNAL CORPS ENGINEERING LABORATORIES FORT MONMOUTH NEW JERSEY	
UNLESS OTHERWISE SPECIFIED: DECIMAL DIMENSIONS INCLUDING HOLE SIZES MAY VARY ±.008 FRACTIONAL DIMENSIONS INCLUDING HOLE SIZES MAY VARY ±1/64 MACHINED ANGLES MAY VARY ±.1° SHEARED ANGLES MAY VARY ±.25° BROKEN ANGLES MAY VARY ±.1° ECCENTRICITY BETWEEN ANY DIAMETERS ON THE SAME CENTERLINE SHALL NOT EXCEED .010 TOTAL INDICATOR READING. ALL DIMENSIONS ARE FINISH DIMENSIONS INCLUDING APPLIED FINISH AND ARE GIVEN IN INCHES.			REVIEWED <i>PME</i>	DATE <i>2 DEC 55</i>			
558-0384-002 - SM-B-249034 SC-DL-248775				APPROVED <i>HLV</i> <i>PME</i>			SCALE <i>1/1</i>
COLLINS NO.	QTY	NEXT ASSY	USED ON				
APPLICATION						SM-B-249240	